



# Modicon M258

Logic controller



# Modicon

## Discover [Modicon](#)

Edge control for Industrial IoT

Modicon IIoT-native edge controllers manage complex interfaces across assets and devices or directly into the cloud, with embedded safety and cybersecurity. Modicon provides performance and scalability for a wide range of industrial applications up to high-performance multi-axis machines and high-available redundant processes.

## Explore our offer

- [Modicon HVAC Controllers](#)
- [Modicon PLC](#)
- [Modicon Motion Controllers](#)
- [Modicon PAC](#)
- [Modicon I/O](#)
- [Modicon Networking](#)
- [Modicon Power Supply](#)
- [Modicon Wiring](#)
- [Modicon Safety](#)

Life Is On




# Quick access to product information

## Get technical information about your product

References

**Modicon TM3**  
I/O expansion modules for Modicon controllers  
Analog I/O modules


Number and type of channels	Input range	Output range	Resolution	Input terminal (mm)	Reference	Weight (kg)
2 enhancement inputs	-10...+10 VDC 0...20 mA, 4...20 mA	10 mA or 10 mA + sign	12 bits	25.4	TM3AI2H	0.110
4 enhancement inputs	-10...+10 VDC 0...20 mA, 4...20 mA	10 mA or 10 mA + sign	12 bits	25.4	TM3AI4H	0.110
4 enhancement or temperature inputs	-10...+10 VDC 0...20 mA, 4...20 mA PT100, RTD, Ni100, Ni200, Ni500, Ni1000, Pt100, Pt200	10 mA or 10 mA + sign	12 bits	25.4	TM3AI4T	0.110
4 differential temperature inputs	-10...+10 VDC 0...20 mA, 4...20 mA PT100, RTD, Ni100, Ni200, Ni500, Ni1000, Pt100, Pt200	10 mA or 10 mA + sign	12 bits	25.4	TM3AI4D	0.110

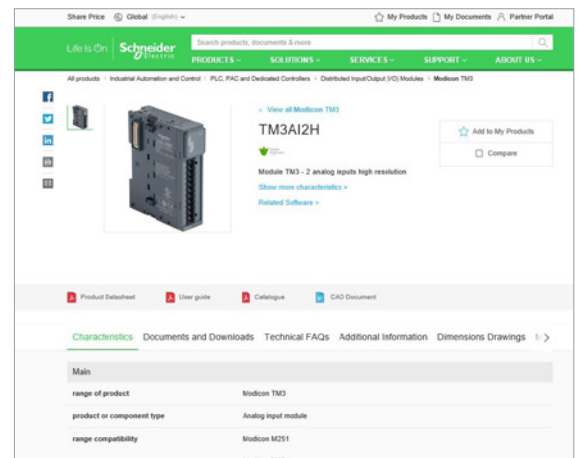


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

## Find your catalog

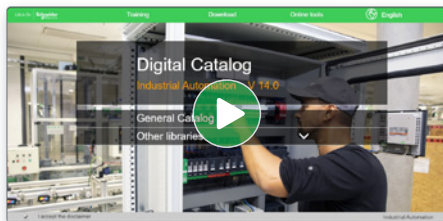

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

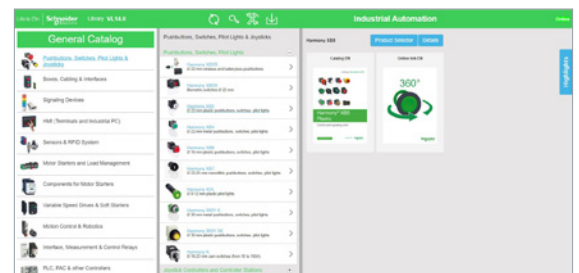


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

## Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

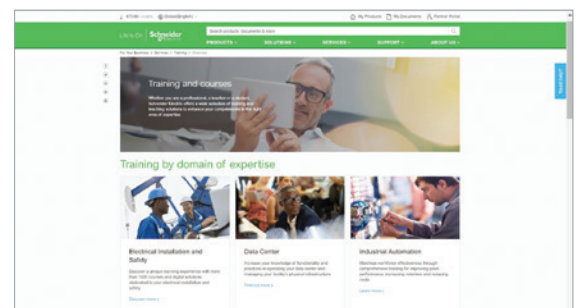

# General content





## Modicon M258 logic controller

### ■ Modicon M258 logic controller

□ <b>Selection guide</b> .....	<b>page 2</b>
□ Presentation	
- Performance .....	page 4
- Development and technology .....	page 4
- Software configuration .....	page 4
- Integration in the Schneider Electric product offer .....	page 4
- Functions .....	page 5
- Offer presentation .....	page 6
- Conformity to standards .....	page 6
- Assembly and mounting .....	page 7
- Local or remote architecture .....	page 7
- Characteristics .....	page 8
- Communication .....	page 8
□ Description .....	page 9
□ References	
- Logic controllers .....	page 10
- Accessories, connection cables .....	page 11

### ■ Modicon TM5 Communication modules

□ Communication modules for Modbus serial link	
- Presentation, description .....	page 12
- References .....	page 13
□ Communication module for Profibus DP fieldbus	
- Presentation, description .....	page 14
- References .....	page 15
■ <b>Product reference index</b> .....	<b>page 16</b>

<b>Applications</b>		<b>General machine control:</b> <input type="checkbox"/> Packaging <input type="checkbox"/> Conveying <input type="checkbox"/> Hoisting <input type="checkbox"/> ...					
		42 digital I/O	42 digital I/O	42 digital I/O + 4 analog inputs	42 digital I/O + 4 analog inputs	42 digital I/O	66 digital I/O + 4 analog inputs
							
<b>User memory</b>	RAM	64 MB (program + data)		64 MB (program + data)			
	Flash	128 Mbytes		128 Mbytes			
<b>User program size</b>		128 program K instructions		128 program K instructions			
<b>Power supply</b>		24 V ~		24 V ~			
<b>Channel connection</b>		With removable spring terminal blocks (supplied)		With removable spring terminal blocks (supplied)			
<b>Inputs</b>	Digital	26 x 24 V ~ inputs including 8 counter inputs (100 kHz)		26 x 24 V ~ inputs including 8 counter inputs (100 kHz)		38 x 24 V ~ inputs including 8 counter inputs (100 kHz)	
	Analog	-		4 inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution		4 inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution	
<b>Digital outputs</b>	Transistor	16 outputs (0.5 A) including 4 reflex outputs		16 outputs (0.5 A) including 4 reflex outputs		4 reflex outputs (0.5 A)	
	Relay	-		-		12	
<b>Built-in communication ports</b>	USB-B mini-port	Programming port for SoMachine software		Programming port for SoMachine software			
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates		Connection of a USB memory stick for transferring programs, data files, firmware updates			
	RJ45 port (MBS)	RS232 serial link, RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Master/Slave Modbus ASCII/RTU, ASCII (character string)		RS232 serial link, RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Master/Slave Modbus ASCII/RTU, ASCII (character string)			
	SUB-D connector (male 9-way) (CAN0)	-	Master CANopen bus (63 slaves)	-	Master CANopen bus (63 slaves)		
	RJ45 port (Ethernet)	Ethernet TCP IP, Web Server, FTP, Ethernet Modbus TCP		Ethernet TCP IP Modbus slave, Web Server, FTP			
<b>Optional communication ports</b>		-		2 PCI slots available on controller for optional communication modules TM5 PC●●● (1): <input type="checkbox"/> Modbus or ASCII serial link <input type="checkbox"/> connection to Profibus DP bus (slave)			
<b>Software programming</b>		With SoMachine software: please consult our catalog <a href="#">SoMachine configuration software</a>		With SoMachine software: please consult our catalog <a href="#">SoMachine configuration software</a>			
<b>Logic controller type</b>		<b>TM258LD42DT</b>	<b>TM258LF42DT</b>	<b>TM258LD42DT4L</b>	<b>TM258LF42DT4L</b>	<b>TM258LF42DR</b>	<b>TM258LF66DT4L</b>
<b>Page</b>		10					

(1) To be ordered separately, see page 12.



Modicon M258 logic controller

The Modicon M258 logic controller is a compact, high-performance and fully expandable PLC. It forms a part of Flexible Machine Control approach, a key component of MachineStruxure™, which brings flexibility and gives an optimised control solution.

This PLC is designed for machine manufacturers (OEMs) focusing on applications such as packaging, hoisting, conveying and storage, textiles and woodworking, hoisting, etc. It offers high-performance solutions for speed control, counting, axis control and communication functions.

## Performance

The Modicon M258 logic controller has a Dual-Core processor:

- Core 1 is dedicated exclusively to managing program tasks and offers the maximum resources for real-time execution of the application code.
- Core 2 is dedicated to executing communication tasks, which then have no further impact on the application execution performance.

The Modicon M258 logic controller expands the machine's capabilities with its ability to manage up to **2400 I/O**, **64 MB** RAM for data and program storage, and **128 MB** Flash memory for application and data backup.

In developing the Modicon M258 logic controller, the cost aspect was taken into account, the CPUs are equipped as standard with:

- 42 or 66 digital I/O
- Embedded serial link and Ethernet port
- 4 analog inputs (TM258●●●●4L references)

## Development and technology

The Modicon M258 logic controller has been developed to minimize the costs of assembly, cabling, commissioning and maintenance.

To this end:

- the modules have removable terminals.
- the electrical connections are made on spring terminals, speeding up the wiring process and also avoiding the need for periodic retightening. In addition, each terminal has a test point for a voltage sensing device.
- The embedded serial link and Ethernet port on the Modicon M258 logic controller have an RJ45 connection at 45° for quick visible connection of your communication channels.
- The modularity of the various bases and expansion modules has been optimized in order to reduce significantly the number of references to be ordered and assembled, while realizing a minimum investment in your configuration is necessary, thanks to a capacity of 2 to 42 channels per expansion module.
- Mechanical assembly of the various parts has been designed to save time during assembly.

## Software configuration

Configuration and programming of M258 controllers and equipment in Schneider Electric's "Flexible Machine Control" concept are both designed to cut costs and optimize machine performance.

Schneider Electric's **SoMachine** software platform can be used to program M258 controllers using:

- IEC 61131-3 programming languages: Instruction List (IL), Ladder Diagram (LD), Function Block Diagram (FBD), Sequential Function Chart/Grafset (SFC) and Structured Text (ST)
- CFC (Continuous Function Chart) language.

PLCopen function blocks are used for managing motion control and axis control on your machines.


Please consult our catalog [SoMachine configuration software](#).

## Integration in the Schneider Electric product offer


Combined with other products dedicated to machine manufacturers in the Schneider Electric offer, such as Altivar variable speed drives, Lexium servo drives, Magelis HMI terminals, TeSys motor starters and contactors, the Modicon M258 logic controller is a must-have element in machine architectures.




SoMachine software platform

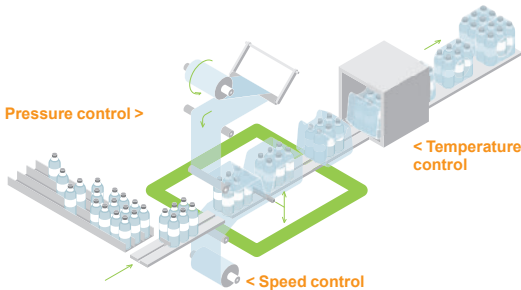

Analog functions

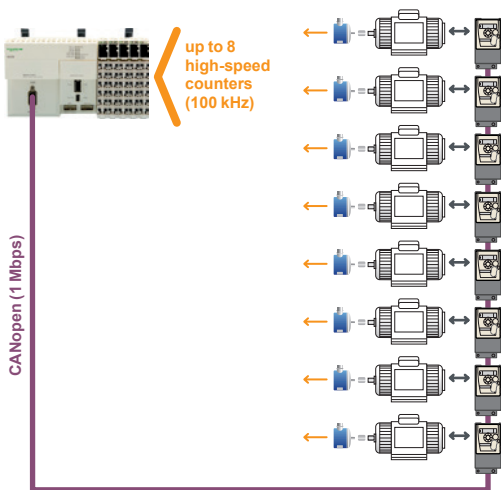

High-speed counter function (one-phase or two-phase)

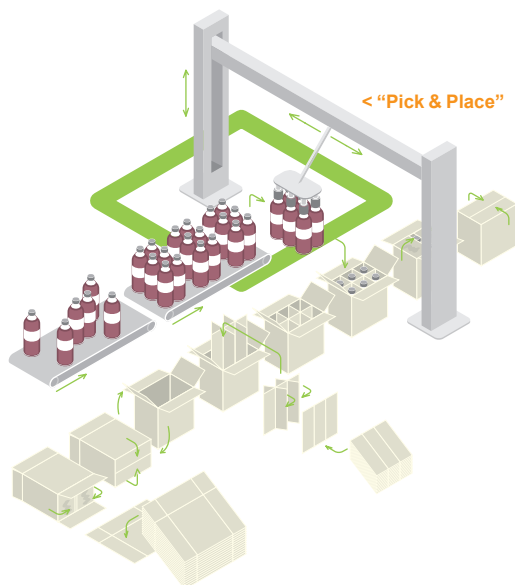

Position control function

## Functions

### Analog functions

For machines that require functions to process data issued by analog sensors/actuators (voltage or current), temperature sensors or PID control sensors, a complete range of expansion modules as well as advanced programming functions are included in the Modicon M258 logic controller offer.

In order to minimize the number of product references of your machines, optimize assembly time and cut costs, M258 logic controllers with the reference **TM258L●●●●4L** include as standard 4 voltage or current analog inputs with 12-bit resolution.

The different expansion modules are available in 2, 4, 6 or 8-channel versions and with either 12 or 16-bit resolution.

The powerful performance of the M258 logic controller enables up to 200 analog I/O and/or temperature modules to be connected, thus extending the limits of machine requirements.

### High-speed counter function (HSC)

In order to meet requirements for machine productivity, the Modicon M258 logic controller has 8 embedded high-speed counters with a counting frequency of 100 kHz for each channel as well as 4 reflex outputs. The availability of these embedded counters and also the presence of the Master CANopen link in **TM258LF●●●●** controllers makes it quick and easy to create low-cost, high-performance multi-axis functions that suit the machines' limitations.

With the availability of "PLCopen" function blocks specific to the motion control functions in the SoMachine software, you can be sure that developing your applications will be quick and reliable.

Moreover, a complete range of high-speed counter modules is available so you can adapt your configuration to your machine's specific requirements.

### Position control function

Several options are offered in terms of position control:

- Either creating a sequence in Lexium 32 servo drives, with communication with the M258 logic controller achieved by the use of digital I/O
- Or creating an application in the M258 logic controller and controlling Lexium 32 servo drives and/or SD3●●● steppers via the integrated Master CANopen link available on **TM258LF●●●●** bases.

### Communication functions

#### Ethernet

M258 logic controller references have an embedded RJ45 Ethernet port (10/100 Mbps, MDI/MDIX) with Ethernet TCP Modbus, Ethernet IP Device, SoMachine on Ethernet, UDP, TCP and SNMP protocols.

In addition, the M258 logic controllers have an embedded Web Server and FTP Server.

As well as the default address based on the MAC address, it is possible to assign a controller IP address via a DHCP server or via a BOOTP server.

Please consult our catalog [Ethernet for machines](#).

#### CANopen

Depending on the reference, M258 logic controllers have an embedded CANopen master.

The link can be configured between 125 Kbps and 1 Mbps and supports up to 63 slaves.

Architectures based on CANopen can be used to distribute I/O modules as close to the sensors and actuators as possible, thus reducing wiring costs and times, and to communicate with different devices such as variable speed drives, servo drives, etc. The CANopen configurator is integrated in the SoMachine software and can also be used to import standard description files in EDS format.

Please consult our catalog [CANopen for machines](#).

#### Modbus serial link

M258 logic controllers have as standard a serial link that can be configured as either RS232/RS485 and incorporates two used protocols on the market:

- Client or Server Modbus ASCII/RTU
- Character string (ASCII)

#### Profibus DP (Decentralized Peripherals)

The Modicon **TM258LD42DT4L**, **TM258LF42DT4L**, **TM258LF42DR** and **TM258LF66DT4L** logic controllers equipped with the **TM5PCDPS** communication module can be connected to Profibus bus: for controlling decentralized sensors, actuators or PLCs via a central master controller



TM258LD42DT logic controller

TM258LF42DT logic controller



TM258LD42DT4L logic controller

TM5PC communication modules



Modicon TM5 compact blocks



Modicon TM5 digital modules



Modicon TM5 digital/Analog modules



Modicon TM5 analog modules



Modicon TM5 Expert modules



Modicon TM5 Common Distribution modules



Modicon TM5 Power Distribution modules



Modicon TM5 transmitter module



Modicon TM5 receiver module

## Offer presentation

### Range

The M258 logic controller range is divided into two controller sizes:

- TM258LD42DT and TM258LF42DT are 177 mm (6.96 in.) wide.
- TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR, and TM258LF66DT4L are at least 237.5 mm (9.35 in.) wide as they have two free PCI slots for optional Modicon TM5 communication modules (Modbus or ASCII serial link, and connection to Profibus DP bus), see pages 12 to 15.

The M258 logic controller range is completed by Modicon TM5 expansion module offer:

- Compact blocks
- Digital modules
- Digital/Analog module
- Analog modules
- Expert modules
- Common Distribution modules
- Power Distribution modules
- Transmitter and receiver modules

Please consult our catalog [Modicon TM5 High-Performance and Safe IP20 Modular I/O System](#).

### Functions

The main component in a system is the controller: 6 M258 logic controller models are offered to cover different control requirements (pressure, temperature, counting, speed, position control, motion, etc.).

M258 logic controllers and I/O modules are programmed with the SoMachine software.

Reference	Embedded functions
<a href="#">TM258LD42DT</a> , <a href="#">TM258LD42DT4L</a>	<ul style="list-style-type: none"> <li>■ 42 digital I/O including 8 high-speed counters (100 kHz)</li> <li>■ Depending on the reference, 4 voltage/current analog inputs can be added</li> </ul>
<a href="#">TM258LF42DT</a> , <a href="#">TM258LF42DT4L</a> , <a href="#">TM258LF42DR</a> , <a href="#">TM258LF66DT4L</a>	<ul style="list-style-type: none"> <li>■ 42 or 66 digital I/O including 8 high-speed counters (100 kHz)</li> <li>■ Depending on the reference, 4 voltage/current analog inputs can be added</li> <li>■ Up to 16 independent axes</li> <li>■ CANopen master</li> </ul>

M258 controllers have two groups of high-speed I/O with, for each group:

- Four sink type high-speed inputs (up to 100 KHz), 2 standard inputs and 2 source type high-speed outputs (up to 100 KHz) dedicated to HSC or PWM functions
- A high-speed input which can be used as an "Encoder capture input"
- Two commons for the inputs
- One common for the outputs
- A power supply (24 V  $\overline{\text{---}}$ ) consisting of 3 units:
  - One for the CPU
  - One for the high-speed I/O modules
  - One for other modules (internal I/O Bus)

### Conformity to standards

Type		Performance
Surge immunity 24 VDC circuit	EN/IEC 61000-4-5	1 kV in common mode
		0.5 kV in differential mode
Surge immunity 230 VAC circuit	EN/IEC 61000-4-5	2 kV in common mode
		1 kV in differential mode
Induced electromagnetic field	EN/IEC 61000-4-6	10 Veff (0.15...80 MHz)
Conducted emission	EN 55011 (IEC/CISPR11)	150...500 kHz, quasi peak 79 dB $\mu$ V
		500 kHz...30 MHz, quasi peak 73 dB $\mu$ V
Radiated emission	EN 55011 (IEC/CISPR11)	30...230 MHz, 10 m @ 40 dB $\mu$ V/m
		230 MHz...1 GHz, 10 m @ 47 dB $\mu$ V/m
		1 GHz...10 GHz, 10 m @ 47 dB $\mu$ V/m



## Assembly and mounting

The components of this system have been designed for simple interlocking mechanical assembly.

An 8-way expansion bus connection (2 for the power supply, 2 for the bus and 4 for the data) is used to distribute data and the power supply when assembling the components: the M258 controller with compact blocks and modules (digital, digital/analog, analog, Expert, common distribution, power distribution, expansion bus).

The elements which make up the system are mounted and dismantled on a symmetrical rail using the locking levers located on top of each device.

Wiring and maintenance of devices is simplified since they are fitted with removable spring terminals. The spring terminals are undone by pressing a locking tab.

The system is integrated into communication networks: the connectors (RJ45, USB, mini-USB and SUB-D type depending on the model) are accessible, as they are located on the controller front panels.

## Local or remote architecture

### Local I/O (1)


A PLC configuration can be local or remote. It consists of an M258 controller with its embedded input and output channels, used in conjunction with compact blocks and/or modules which are used to increase the number of channels and/or "Application-specific" functions.

■ Compact blocks represent a way of adding a large number of I/O with a single reference. This possibility reduces both the cost per channel, and also assembly times. These compact blocks are available in 4 references offering a high level of flexibility in configurations.


■ I/O modules (a combination of a bus base, an electronic module and a terminal block) complete this configuration and, being modular with between 2 and 12 channels, make it possible to adjust the number of channels to exactly that required. Addition of digital or analog modules, temperature or high-speed modules increases the processing capabilities of applications.

### Configuration of local I/O

- 1 XBT GC supervision graphic touch screen terminal
- 2 M258 controller
- 3 Compact blocks or I/O modules

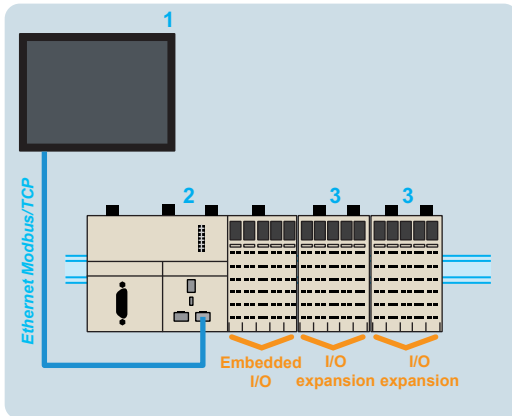

Local I/O

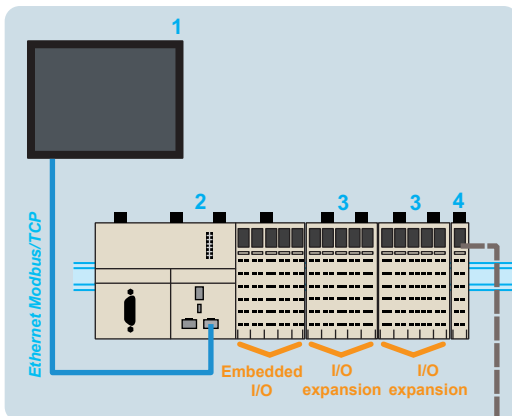

### Remote I/O (1)

Because of its backplane bus management, the TM5 system can be used to control I/O remotely.

The same modules can be used in either a local and/or remote configuration, linked together with expansion bus cables.


The total maximum distance between 2 remote islands is 100 m (328.0 in.) and the maximum number of islands is 25, i.e. a total distance of up to 2500 m (8202.09 in.).

This function gives a high level of flexibility, while retaining **synchronization of data acquisition**, since the expansion modules are on the same backplane bus.

### Configuration of remote I/O

- 1 XBT GC supervision graphic touch screen terminal
- 2 M258 controller
- 3 Compact blocks or I/O modules
- 4 Transmitter modules
- 5 Receiver modules
- 6 TM5 expansion bus cables
- 7 Common distribution modules

(1) Please consult our catalog [Modicon TM5 High-Performance and Safe IP20 Modular I/O System](#).

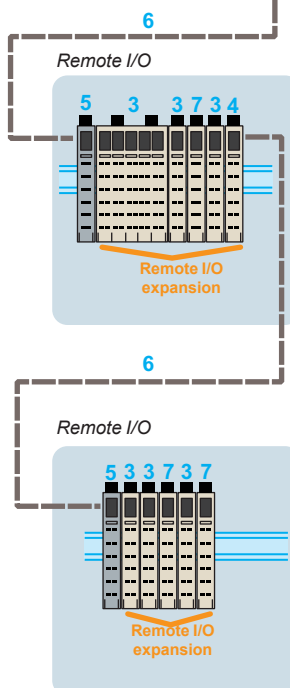

## Characteristics of M258 logic controllers

<b>Certifications</b>	CE, CSA, C-Tick, CULus, GOST-R
<b>Standards</b>	CSA C22.2 N° 142, IEC 61131-2, UL 508, CSA C22.2 N° 213
<b>Ambient operating temperature</b>	-10...+60 °C (+14...+140 °F) horizontal installation -10...+50 °C (+14...+122 °F) vertical installation
<b>Storage temperature</b>	-25...+70 °C (-13...+158 °F)
<b>Relative humidity</b>	5...95 % (non-condensing)
<b>Operating altitude</b>	<input type="checkbox"/> 0...2,000 m (0...6,562 ft.): complete specification for temperature and insulation <input type="checkbox"/> 2,000...4,000 m (6,562...13,123 ft.): temperature derating: +1°C/400 m (+1.8°F/1,312 ft.), insulation losses: 150 V ---/1,000 m (150 V ---/3,280 ft.)
<b>Storage altitude</b>	0...3000 m (0...9842 ft.)
<b>Resistance to fast transients</b>	<input type="checkbox"/> 2 kV power lines conforming to EN/IEC 61000-4-4 <input type="checkbox"/> 1 kV shielded cable conforming to EN/IEC 61000-4-4 <input type="checkbox"/> 1 kV I/O conforming to EN/IEC 61000-4-4
<b>Power supply</b>	24 V --- Voltage limit (including ripple): 19,2...28,8 V --- Max. consumption: ≤ 18.11 W

## Communication

M258 logic controllers have the following built-in communication ports:

References	Communication ports	Use
<a href="#">TM258LD42DT</a> <a href="#">TM258LD42DT4L</a>	RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	<input type="checkbox"/> FTP server <input type="checkbox"/> Web server <input type="checkbox"/> Modbus TCP server <input type="checkbox"/> Modbus TCP client <input type="checkbox"/> Manager SoMachine <input type="checkbox"/> SNMP <input type="checkbox"/> Ethernet IP device <input type="checkbox"/> Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	2 PCI slots for communication modules = 2 x 9-way male SUB-D	Addition of optional communication modules for a serial link and a connection on the bus Profibus DP (1)
<a href="#">TM258LF42DT</a> <a href="#">TM258LF42DT4L</a> <a href="#">TM258LF42DR</a> <a href="#">TM258LF66DT4L</a>	1 x RJ45 Configurable as RS232 or RS485	ASCII or RTU exchange with Modbus communication protocol
	1 x RJ45 (MDI/MDIX port)	<input type="checkbox"/> FTP server <input type="checkbox"/> Web server <input type="checkbox"/> Modbus TCP server <input type="checkbox"/> Modbus TCP client <input type="checkbox"/> Manager SoMachine <input type="checkbox"/> SNMP <input type="checkbox"/> Ethernet IP device <input type="checkbox"/> Modbus device
	1 x USB-A	Connection of a USB memory stick for transferring (uploading/downloading) programs, data and/or firmware
	1 x mini-USB	Programming port (480 Mbps)
	1 x 9-way male SUB-D	Master CANopen connection
	2 PCI slots for communication modules = 2 x 9-way male SUB-D	Addition of optional communication modules for a serial link and a connection on the bus Profibus DP (2)


## Embedded Ethernet

M258 logic controllers have an embedded Ethernet link via a direct connection to their RJ45 port.

- Speed: “10 BaseT” and “100 BaseTX” with auto-negotiation
- RJ45 port (MDI/MDIX): automatic adaptation to a straight or crossed cable

References	Protocols	Number of connections
<a href="#">TM258LD42DT</a>	Modbus server	8
<a href="#">TM258LD42DT4L</a>	Modbus device	2
<a href="#">TM258LF42DT</a>	SoMachine	3 (3)
<a href="#">TM258LD42DT4L</a>	Ethernet IP device	16
<a href="#">TM258LF42DR</a>	FTP server	4
<a href="#">TM258LF66DT4L</a>	Web server	10

(1) Only on [TM258LD42DT4L](#).  
 (2) Only on [TM258LF42DT4L](#), [TM258LF42DR](#) and [TM258LF66DT4L](#).  
 (3) The Oscilloscope function uses one connection.

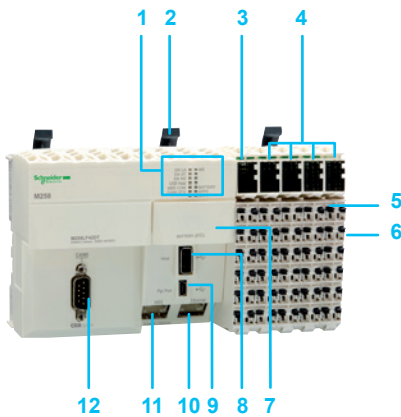


## Description

### The TM258LD42DT and TM258LF42DT logic controllers comprise:

- 1 A display block with:
  - 4 controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
  - 6 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS)
- 2 Locking lever for mounting/dismounting on  $\perp$  symmetrical rail.
- 3 A 24 V  $\overline{\text{---}}$  power supply module with removable terminal block and locking lever, display block and slot for a label.
- 4 I/O modules, each one with: a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder.
- 5 Removable terminal block with locking lever for locking/unlocking.
- 6 On the side, an expansion bus connection for the link with the next module.
- 7 A slot for the RTC (Real Time Clock) battery.
- 8 A USB-A connector (marked Host) for connection of a USB memory stick for transferring programs, data or firmware updates.
- 9 A USB-B mini-connector (marked Pgr Port) for connection to the programming PC.
- 10 An RJ45 connector (marked Ethernet) for connection to the Ethernet network and/or connection to the Magelis XBT GC graphic terminal.
- 11 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link.
- 12 A 9-way male SUB-D connector, marked CAN 0, for connection to the CANopen bus (TM258LF42DT only).

### The TM258LD42DT4L/LF42DT4L/LF42DR/LF66DT4L logic controllers comprise:

- 1 A display block with:
  - 4 controller status LEDs (RUN/MS, BATTERY, APP0 and APP1)
  - 6 built-in communication port status LEDs (*Eth* LA, *Eth* ST, *Eth* NS, USB Host, MBS COM, CAN 0 STS)
- 2 Locking lever for mounting/dismounting on  $\perp$  symmetrical rail.
- 3 Two free PCI slots for the communication module.
- 4 A 24 V  $\overline{\text{---}}$  power supply module with removable terminal block and locking lever, display block and slot for a label.
- 5 I/O modules, each one with: a removable terminal block with locking lever, a display block showing the I/O states and a slot for a label-holder.
- 6 Removable terminal block with locking lever for locking/unlocking.
- 7 On the side, an expansion bus connection for the link with the next module.
- 8 A slot for the RTC (Real Time Clock) battery.
- 9 A USB-A connector (marked Host) for connection of a USB memory stick for transferring programs, data or firmware updates.
- 10 A USB-B mini-connector (marked Pgr Port) for connection to the programming PC.
- 11 An RJ45 connector (marked Ethernet) for connection to the Ethernet network and/or connection to the Magelis XBT GC graphic terminal.
- 12 An RJ45 connector (marked MBS) for the RS232 or RS485 serial link.
- 13 A 9-way male SUB-D connector, marked CAN 0, for connection to the CANopen bus (TM258LF42DT4L, TM258LF42DR and TM258LF66DT4L only).

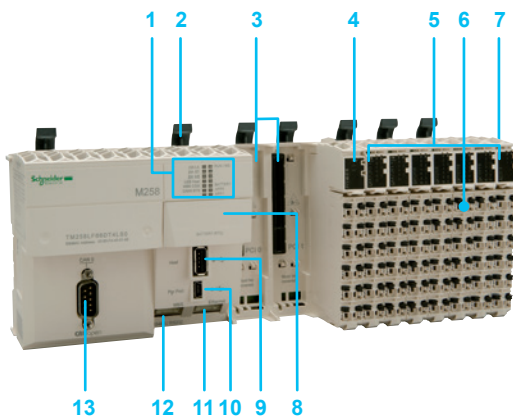

## References

Logic controllers, 24 V  $\overline{\text{---}}$  power supply (1)

TM258LD42DT



TM258LF42DT



TM258LD42DT4L



TM258LF42DT4L



TM258LF42DR






TM258LF66DT4L

Nbr. of I/O	Inputs	Outputs	Built-in communication ports	Reference	Weight kg/lb
42 I/O	<ul style="list-style-type: none"> <li>■ 26 x 24 V <math>\overline{\text{---}}</math> digital inputs including 8 counter inputs (100 kHz)</li> </ul>	<ul style="list-style-type: none"> <li>■ 16 transistor digital outputs (0.5 A) including 4 reflex outputs</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> </ul>	<a href="#">TM258LD42DT</a>	0.500/ 1.102
			<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 SUB-D port (9-way male): CANopen master</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> </ul>	<a href="#">TM258LF42DT</a>	0.550/ 1.213
42 + 4 I/O	<ul style="list-style-type: none"> <li>■ 26 x 24 V <math>\overline{\text{---}}</math> digital inputs including 8 counter inputs (100 kHz)</li> <li>■ 4 analog inputs 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution</li> </ul>	<ul style="list-style-type: none"> <li>■ 16 digital transistor outputs (0.5 A) including 4 reflex outputs</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> <li><input type="checkbox"/> + 2 free PCI slots for optional communication module (2): RS232/RS485 serial link and Profibus DP bus</li> </ul>	<a href="#">TM258LD42DT4L</a>	0.770/ 1.698
			<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 SUB-D port (9-way male): CANopen master</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> <li><input type="checkbox"/> + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus</li> </ul>	<a href="#">TM258LF42DT4L</a>	0.770/ 1.698
42 I/O	<ul style="list-style-type: none"> <li>■ 26 x 24 V <math>\overline{\text{---}}</math> digital inputs including 8 counter inputs (100 kHz)</li> </ul>	<ul style="list-style-type: none"> <li>■ 4 digital transistor (reflex) outputs (0.5 A)</li> <li>■ 12 relay outputs</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 SUB-D port (9-way male): CANopen master</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> <li><input type="checkbox"/> + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus</li> </ul>	<a href="#">TM258LF42DR</a>	0.800/ 1.764
			<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 SUB-D port (9-way male): CANopen master</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> <li><input type="checkbox"/> + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus</li> </ul>	<a href="#">TM258LF66DT4L</a>	0.800/ 1.764
66 + 4 I/O	<ul style="list-style-type: none"> <li>■ 38 x 24 V <math>\overline{\text{---}}</math> digital inputs including 8 counter inputs (100 kHz)</li> <li>■ 4 analog inputs + 10 V/- 10 V, 4-20 mA/0-20 mA, 12-bit resolution</li> </ul>	<ul style="list-style-type: none"> <li>■ 28 digital transistor outputs (0.5 A) including 4 reflex outputs</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> 1 RJ45 port: Ethernet</li> <li><input type="checkbox"/> 1 SUB-D port (9-way male): CANopen master</li> <li><input type="checkbox"/> 1 USB-A port: program transfer</li> <li><input type="checkbox"/> 1 USB-B mini-port: software programming</li> <li><input type="checkbox"/> 1 RJ45 port: RS232/RS485 serial link</li> <li><input type="checkbox"/> + 2 free PCI slots for optional communication modules (2): RS232/RS485 serial link and Profibus DP bus</li> </ul>	<a href="#">TM258LF66DT4L</a>	0.800/ 1.764

(1) The Modicon M258 logic controllers require a power supply with a nominal voltage of 24 V  $\overline{\text{---}}$ , Separated Extra Low Voltage (SELV-rated) according to IEC 61140.


The SELV-rating means that SELV isolation is provided between the electrical input and output of the power supply.

(2) To be ordered separately see [page 12](#).

References						
Accessories						
Type	Used for	Colour	Sold in lots of	Unit reference	Weight kg/ lb	
 TM5ACTLC100	Marking the terminal blocks on the I/O channels	Transparent	100	TM5ACTCH100	0.002/ 0.004	
 TM5ACTCH100	Locking plain text cover holder (Order with plain text cover holder TM5ACTCH100)	Transparent	100	TM5ACTLC100	0.001/ 0.002	
	Plain text cover holder TM5ACTCH100	White	100	TM5ACTLS100	0.001/ 0.002	
Connection cables						
Description	Use from	to	Length m/ft..	Reference	Weight kg lb	
 TCSXCNAMUM3P	PC USB port	USB mini-port on M258 controllers	3 / 9.84	TCSXCNAMUM3P	0.065 / 0.143	
	RJ45 port on XBT GC graphic touch screen terminals	RJ45 port on M258 controllers	2.5 / 8.20	XBTZ9980	0.230/ 0.507	
	SUB-D port (9-way female) on DTE equipment (1): printer, hand-held bar code reader, etc.	RJ45 port on M258 controllers	3 / 9.84	TCSMCN3M4F3C2	0.150/ 0.331	
	SUB-D port (9-way female) on DCE equipment (2): GSM modem	RJ45 port on M258 controllers	3 / 9.84	TCSMCN3M4M3S2	0.150/ 0.331	

(1) DTE: Data Terminal Equipment.

(2) DCE: Data Communication Equipment.

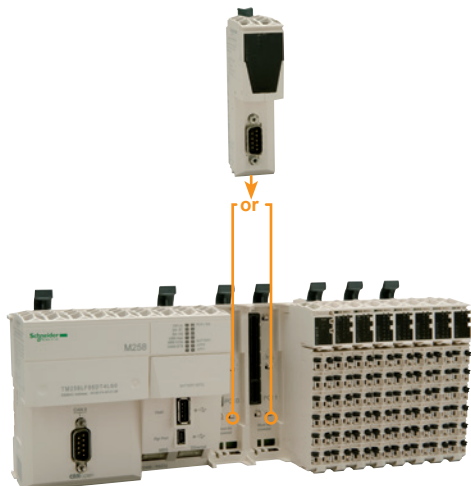

TM5PCRS communication module: for mounting the two free PCI slots in the Modicon M258 logic controller or Modicon LMC058 motion controller

### Presentation


TM5PCRS communication modules are designed for TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR, TM258LF66DT4L logic controllers, LMC058LF42 and LMC058LF424 motion controllers and are installed in one of the two free PCI slots in.

TM5PCRS communication modules can be used to configure one or two additional Modbus or ASCII serial links as RS232 or RS485.

*Nota: the maximum number of communication modules is 2.*

### Modbus and Character mode serial links

Cabling system: [Please consult our catalog Modbus for machines](#)

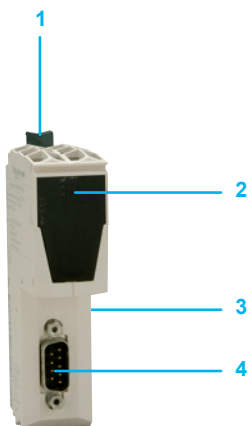

### Description

TM5PCRS communication modules comprise:

- 1 A locking clip for mounting/dismounting on the controller
- 2 A channel and module diagnostics LED display block
- 3 A connector for linking to the controller
- 4 A SUB-D connector (male 9-way) for connection to the serial link

### Serial link

LED	Colour	Status: on
Status	Green	Operation in progress
	Red	Controller starting
RXD	Yellow	Reception on interface: <input type="checkbox"/> RS232 with TM258PCRS2 <input type="checkbox"/> RS485 with TM258PCRS4
TXD	Yellow	Transmission on interface: <input type="checkbox"/> RS232 with TM258PCRS2 <input type="checkbox"/> RS485 with TM258PCRS4



TM5PCRS●

References					
Description	Used for	Physical layer/ protocols	Built-in port	Reference	Weight kg/lb
Modbus serial link communication modules	Logic controllers: <input type="checkbox"/> TM258LD42DT4L, <input type="checkbox"/> TM258LF42DT4L, <input type="checkbox"/> TM258LF42DR, <input type="checkbox"/> TM258LF66DT4L Motion controllers: <input type="checkbox"/> LMC058LF42, <input type="checkbox"/> LMC058LF424	RS232/ Modbus/ASCII, SoMachine	SUB-D connector (male 9-way)	<a href="#">TM5PCRS2</a>	0.064/ 0.14
		RS485 / Modbus/ASCII, SoMachine	SUB-D connector (male 9-way)	<a href="#">TM5PCRS4</a>	0.064/ 0.14


# Modicon M258 logic controller

## Communication modules for connection to the Profibus DP fieldbus

### Presentation

#### Profibus DP (Decentralized Peripherals)

Profibus (Process Field Bus) is a fieldbus for controlling decentralized sensors, actuators or PLCs via a central master controller.

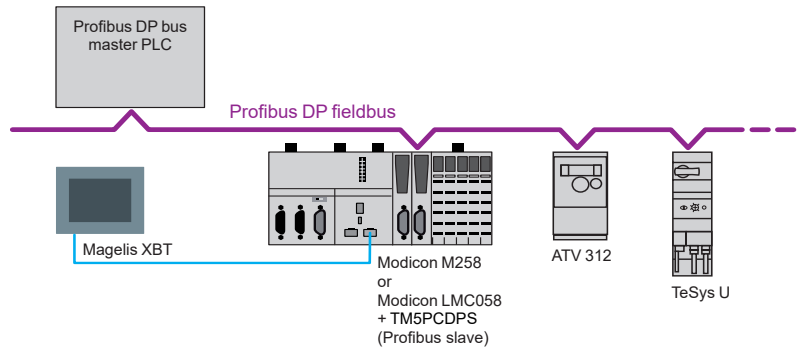

#### Connectable devices

The following Schneider Electric devices can be connected to this bus:

- Modicon TM258LD42DT4L, TM258LF42DT4L, TM258LF42DR and TM258LF66DT4L logic controllers equipped with the **TM5PCDPS** communication module
- Modicon LMC058LF42 and LMC058LF424 motion controllers equipped with the **TM5PCDPS** communication module
- TeSys U and TeSys T starter-controllers
- Momentum and Modicon STB distributed I/O
- Altivar 312/61/71 variable speed drives for asynchronous motors
- Lexium 05 and 15 servo drives for brushless motors
- Altistart ATS 48 soft start-soft stop units


And any third-party device compatible with Profibus DP standard profiles.

#### Profibus communication module


The **TM5PCDPS** communication module is designed for **TM258LD42DT4L**, **TM258LF42DT4L**, **TM258LF42DR** and **TM258LF66DT4L** logic controllers and **LMC058LF424** motion controllers and is installed in one of the two free PCI slots.

The **TM5PCDPS** communication module is used to configure the connection as a slave on the Profibus DP fieldbus.

**Note:** The maximum number of communication modules is two (see [page 12](#)) with a single **TM5PCDPS** Profibus DP slave communication module.

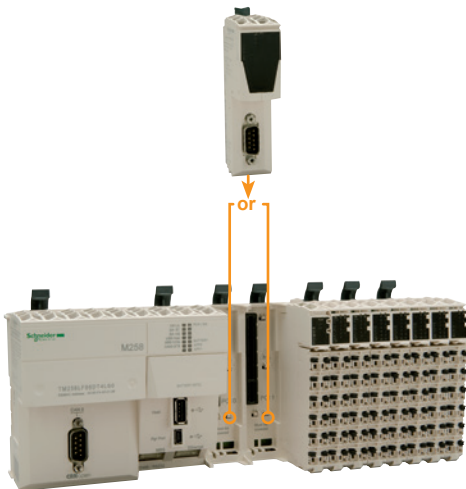

TM5PCDPS communication module: For mounting on one of the two free PCI slots on a Modicon M258 controller or Modicon LMC058 motion controller

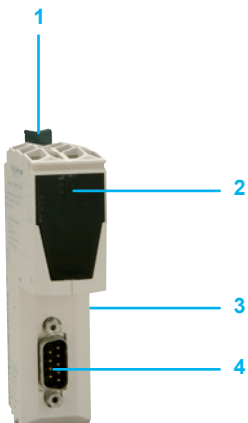

### Description

The **TM5PCDPS** communication module features:

- 1 A locking clip for mounting/removing the module onto/from the logic controller or motion controller
- 2 A LED display block for the module channels and diagnostics
- 3 A connector for linking the logic controller or motion controller
- 4 A SUB-D connector (male 9-way) for connection to the Profibus fieldbus



# Modicon M258 logic controller

## Communication modules for connection to the Profibus DP fieldbus



TM5PCDPS



490NAD91103

### References

#### Modicon TM5 communication module

Description	For use with	Profile	Built-in port	Reference	Weight kg/ lb
<b>Communication module for Profibus DP</b> (244 I/O data bits)	Logic controllers:	V1 slave	SUB-D connector (male 9-way)	<a href="#">TM5PCDPS</a>	0.064/ 0.14
	<input type="checkbox"/> TM258 LD42DT4L <input type="checkbox"/> TM258 LF42DT4L <input type="checkbox"/> TM258 LF42DR <input type="checkbox"/> TM258 LF66DT4L				
	Motion controllers:				
	<input type="checkbox"/> LMC058LF42 <input type="checkbox"/> LMC058LF424				

#### Profibus DP fieldbus connection components

Description	Length m/in.	Reference	Weight kg
<b>Profibus DP connection cables</b>	100 / 328.08	<a href="#">TSXPBSCA100</a>	–
	400 / 1312.33	<a href="#">TSXPBSCA400</a>	–

Description	Type	Reference	Weight kg/ lb
<b>Remote I/O on Profibus DP fieldbus</b>	Modicon STB network interface module	<a href="#">STBNDP2212</a>	0.140/ 0.308
<b>Connectors for remote I/O communication module</b>	Line terminator	<a href="#">490NAD91103</a>	–
	In-line connector	<a href="#">490NAD91104</a>	–
	In-line connector and terminal port	<a href="#">490NAD91105</a>	–

---

#	
490NAD91103	15
490NAD91104	15
490NAD91105	15
S	
STBNDP2212	15
T	
TCSMCN3M4F3C2	11
TCSMCN3M4M3S2	11
TCSXCNAMUM3P	11
TM258LD42DT	6 8 10
TM258LD42DT4L	6 8 10
TM258LF42DR	6 8 10
TM258LF42DT	6 8 10
TM258LF42DT4L	6 8 10
TM258LF66DT4L	6 8 10
TM5ACTCH100	11
TM5ACTLC100	11
TM5ACTLS100	11
TM5PCDPS	15
TM5PCRS2	13
TM5PCRS4	13
TSXPBSCA100	15
TSXPBSCA400	15
X	
XBTZ9980	11

Life Is On



The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric